



20W 100V Tel Input

### Descriptions

Mic1 input by combined connector of 1/4" phone jack and XLR with phantom power, Mic2 by 1/4" phone jack, Aux1 input by dual RCA, tel input by phoenix connector.

Line output by dual RCA type. Mic with Vox priority(with Vox level control) and telephone input with secondary input over all other inputs.

100V, 70V and 4-16ohms speaker output.


AC 120V or 230V operation. Mic1-2, Aux1, tel, master volume control and bass/treble tone control.

High temp, short circuit and over load protection.

### Specifications

Model	T-20AP
Rated Power Output	20W
Speaker Outputs	70V, 100V & 4~16Ω
Input Sensitivity & Impedance	MIC: 5mV/600Ω , Unbalanced TRS input TEL: 1000mV/10KΩ , Unbalanced RCA input AUX: 350mV/10KΩ , Unbalanced RCA input
Output Sensitivity & Impedance	LINE OUT: 1000mV/470Ω , Unbalanced RCA output
Tone	Bass: ± 10dB at 100Hz Treble: ± 10dB at 10KHz
Frequency Response	50Hz~16KHz(+1dB, -3dB)
S/N Ratio	MIC: 66dB, AUX: 80dB
THD	Less than 0.5% at 1KHz, 1/3 rated power
Muting Function	MIC 1 overrides other input signals with 30dB attenuation
Crosstalk	≤ 50dB
Phantom Power	+48V
Cooling	Button-up convect and cool
Protection	High temp, overload & short-circuit
Power Supply	~110V/60Hz or ~230V/50Hz or DC 24V
Power Consumption	40W
Weight	2.5Kg
Dimensions	360×270×66mm
Finish	Panel: aluminum plate, black Case: steel plate, black

Rear Panel

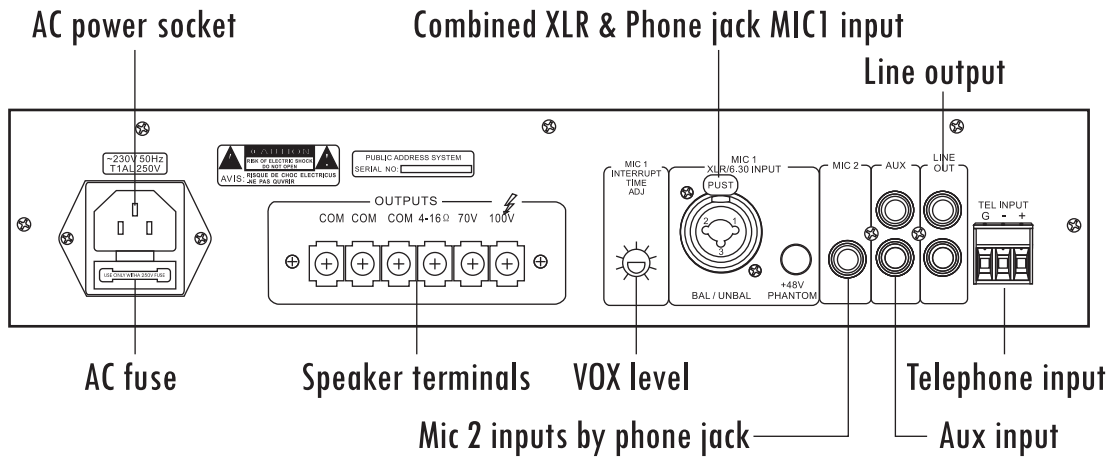

Connections

