


AD-707a UHF Wideband 4-Channel Antenna Divider

Key Features

- Optimized for the 470 – 850 MHz carrier frequency range, the AD-707a is fully compatible with US and EU telecom regulations.
- Allows 2 – 4 sets of UHF diversity receivers to operate from a pair of antennas, greatly simplifying antenna installation and increasing reception range and efficiency.
- Built with the latest high dynamic-range components and wideband microstrip circuit design, it features ultra-low intermodulation distortion, and eliminates spurious interference in multiple system usage. System output gain approximately equals to 1.
- Output connectors provide bias for a ground plane antenna with antenna booster and a wideband receiving log antenna with built-in booster.
- It has 2 sets of 4-channel antenna output connectors for direct connection to 4 sets of diversity receivers.
- It provides 2 sets of antenna input and output connectors.
- The output connector can be linked to the input connector of another antenna divider.
- Booster power indicators assist with identifying the booster linkage.

Technical Specifications

Frequency Range	UHF 470 – 850 MHz
IIP3	+32 dBm
RF Output Gain	+1.0 dB \pm 1 dB
Input / Output Gain	+1.0 dB \pm 1 dB
Output Port Isolation	>18 dB at 400 – 1000 MHz
Filter Selection	Low sideband \geq 35 dB ; High sideband \geq 30 dB
Input / Output Connectors	2 sets of 1-to-4 active divider outputs, 2 sets of 1-to-1 active outputs. TNC female. 50 Ω impedance.
Antenna Input Power Supply	Antenna A/B input port supplies bias 8.3 V DC, 230 mA max. to booster
Power Supply	12 – 15 V DC
Current Consumption	Approx. 190 mA at 12 V DC
Dimension (W \times H \times D)	420 \times 44 \times 190 mm / 16.5 \times 1.7 \times 7.5 "
Weight	Approx.1.5 kg / 3.3 lbs

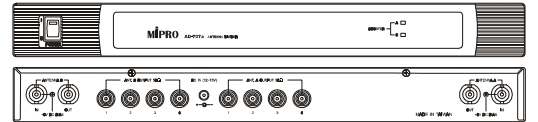

MIPRO Electronics Co., Ltd

Headquarters: 814 Pei-kang Road, Chiayi, 60096, Taiwan
Tel: +886.5.238.0809 | Fax: +886.5.238.0803
www.mipro.com.tw | mipro@mipro.com.tw