
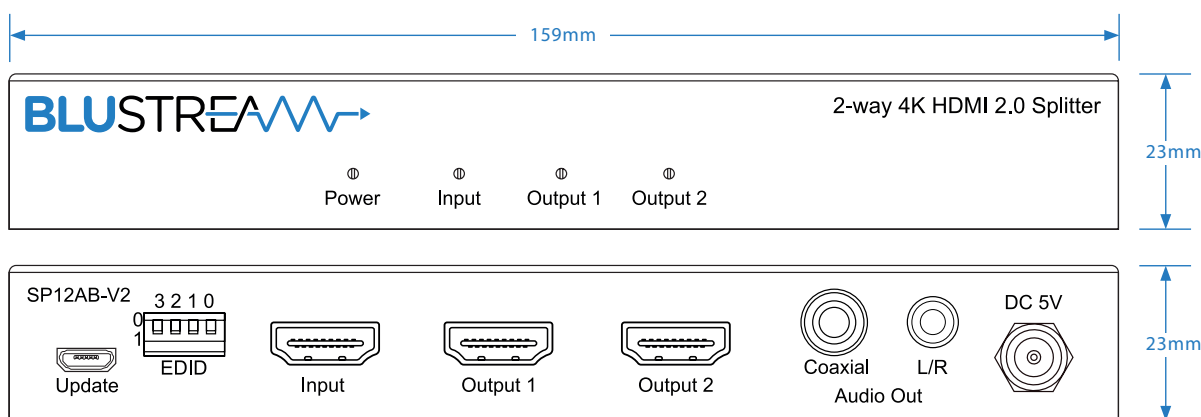


2-Way HDMI 2.0 Splitter

Description

Our SP12AB-V2 4K HDMI 2.0 splitter distributes a single HDMI source to two simultaneous outputs. The splitter supports full HDMI 2.0 and HDCP 2.2 with video resolutions up to and including 4K @ 60Hz 4:4:4.

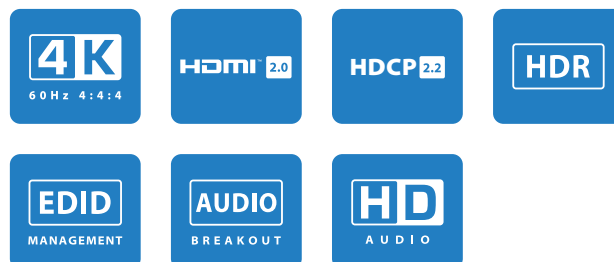

Key Features

- Features 1 x HDMI input that is replicated to 2 x HDMI outputs
- Supports HDMI 2.0 18 Gbps specification including HDR
- Supports up to 4K UHD 60Hz 4:4:4
- Supports all industry standard video resolutions including VGA-WUXGA and 480i-4K
- Supports all known HDMI audio formats including Dolby TrueHD, Atmos and DTS-HD Master Audio transmission
- HDMI audio breakout to analogue L/R audio and coaxial digital outputs concurrently
- Advanced EDID management
- HDCP 2.2 Support



Connectivity

- **Video Input Connectors:** 1 x HDMI Type A
- **Video Output Connectors:** 2 x HDMI Type A
- **EDID:** 4-PIN DIP switch
- **Audio Output Connectors:** 1 x RCA (S/PDIF), 1 x Analogue audio L/R (3.5mm stereo jack)

Specifications

- **Dimensions (W x D x H):** 159mm x 64mm x 23mm
- **Shipping Weight:** 0.6kg
- **Operating Temperature:** 32°F to 104°F (0°C to 40°C)
- **Storage Temperature :** -4°F to 140°F (-20°C to 60°C)

Included Accessories

Rack Mount	Mounting brackets
Power Supply	5V/1A DC screw connector

Regulatory Compliance



CAN ICES-3 (B)/NMB-3(B)