

CEILING LOUDSPEAKERS

EVAC Voice Evacuation Ceiling Loudspeakers


Metal ceiling loudspeakers with built-in 100V transformer.
Steel grill and fire dome. Designed for easy mounting in to false ceilings

EVAC 6


EVAC6 is equipped with ceramic wire terminals mounted outside loudspeaker body. Transformer tap switch is also outside the speaker body and so is easily accessible for the installer. The EVAC 6 has an integrated 6" 10W coaxial speaker, giving superb reproduction of voice and background music in voice evacuation situations.




HORIZONTAL / VERTICAL POLAR DIAGRAMS

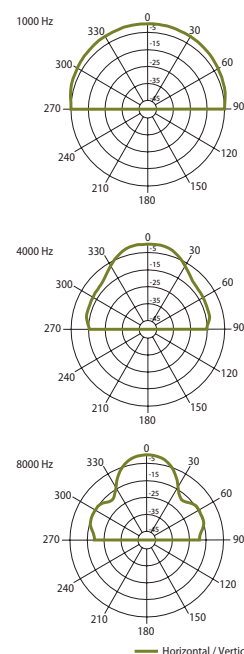

FREQUENCY RESPONSE

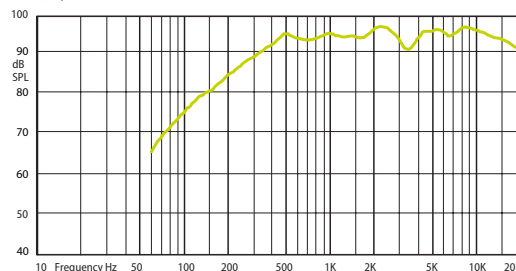

IMPEDANCE

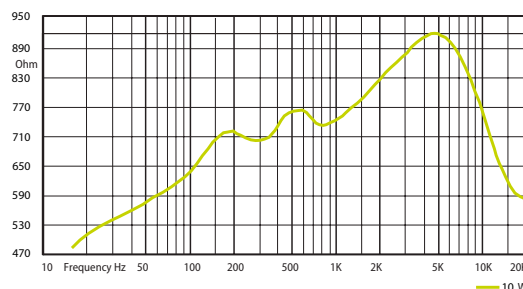

Technical Specifications	EVAC 6
Rated power	10 W
Transformer power taps	10 W – 5 W – 2,5 W
Sensitivity	93 dB (1 W/1 m)
Maximum SPL	102 dB (Pmax/1 m) at 2420 Hz
Frequency response	150 Hz – 20 kHz
Dispersion at 1000 Hz	180° conical
Driver dimensions	6" (152 mm)
Dimensions	ø 200 mm x 101 mm
Weight	1,43 kg
Material	Steel
Colour	Speaker - white (RAL 9016), fire dome - orange (RAL 2008)