
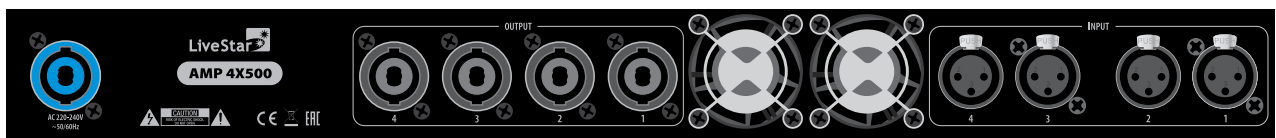


Live Star AMP 4X500

Live Star AMP 4X500 professional 4 channel installation amplifier. Offers high reliability and performance stability in a compact and light weight 1U-sized body. Features modular design

(each channel is fully separated, preventing any interference to other channels.)

Switch mode power supply, intelligent limiter, protection circuitry, variable-speed fan.

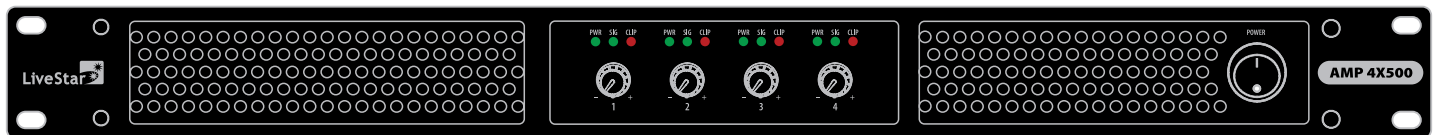

Technical Specifications	Live Star AMP 4X500
Power supply	220-240 V, 50/60 Hz
Channels	4
Output Power 8Ω	4x 350 W
Output Power 4Ω	4x 500 W
Output Power 2Ω	4x 600 W
Output	Speaker twist connector
Input	Balanced XLR
Input Impedance	20 kΩ
Input gain	35 dB
Frequency Response (8Ω)	20 Hz – 20 kHz
THD+N	< 0.1%
S/N ratio	> 105 dB
Crosstalk	> 75 dB
Cooling	Forced air cooling
Dimensions (H x W x D)	483 mm × 375 mm × 44 mm
Weight	7.2 kg