

CABINET LOUDSPEAKERS

iSpeak Surface Mount Plastic Loudspeakers

Plastic enclosure surface mount loudspeaker with built-in 100V line transformer.




iSpeak 5EN

iSpeak 5EN ABS plastic cabinet loudspeaker for constant voltage speaker installation systems. Effortless mounting on any surface: walls or ceilings. Modern, simple and compact form design cabinet loudspeaker with integrated 5" full range driver.


This loudspeaker produces clear intelligible sound and is good for speech and background music applications. Especially suitable for places where loudspeakers should not make any influence to interior. Conforms EN54-24 standard.





HORIZONTAL / VERTICAL POLAR DIAGRAMS



FREQUENCY RESPONSE

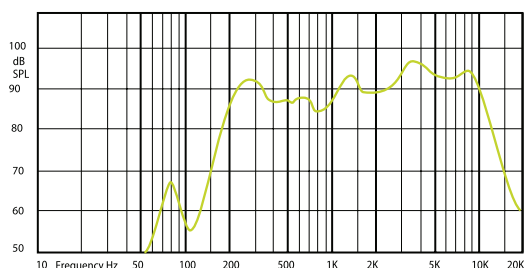

IMPEDANCE

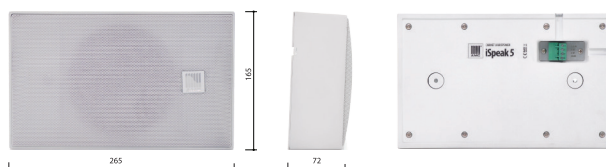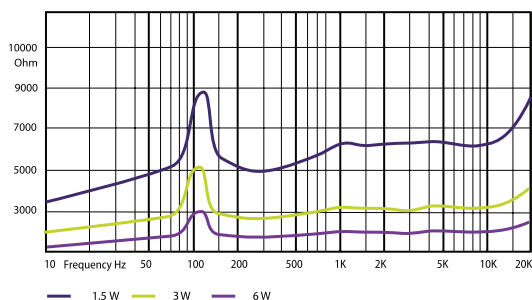

| Technical Specifications | iSpeak 5EN |
|--------------------------|--|
| Rated power | 6 W |
| Transformer power taps | 6 W - 3 W - 1,5 W |
| Sensitivity | 91 dB (1W/1m) |
| Maximum SPL | 99 dB |
| Frequency response | 200 Hz - 12 kHz |
| Dispersion at 1000 Hz | 180° (H), 173° (V) |
| Driver dimensions | 5" (127 mm) |
| Dimensions | 265 mm x 165 mm x 72 mm |
| Weight | 1,2 kg |
| Material | High impact polystyrene plastic, steel grill |
| Colour | White (RAL 9016) |