

CABINET LOUDSPEAKERS

# iSpeak Surface Mount Plastic Loudspeakers



Plastic enclosure surface mount loudspeakers with built-in 100V line transformer.

## iSpeak 6


Designed to be easily and quickly mounted on any flat surface, horizontally or vertically. The enclosure features a full range speaker giving excellent speech intelligibility and is ideal for background music reproduction. It is also particularly good for applications with sensitive interiors. Available in two white shades, RAL9016 and RAL 9018.




HORIZONTAL / VERTICAL POLAR DIAGRAMS

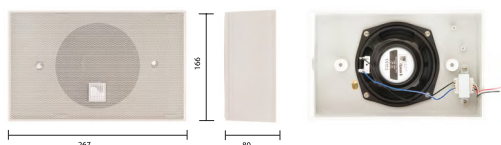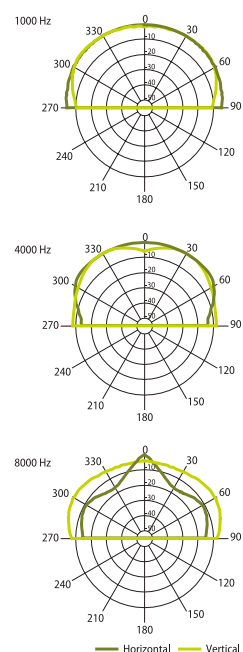

FREQUENCY RESPONSE

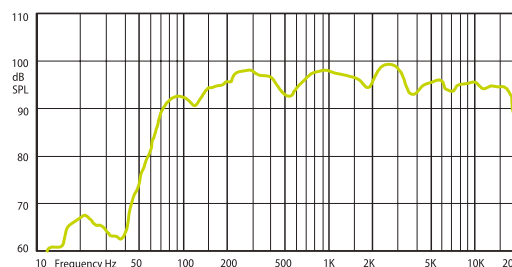

IMPEDANCE

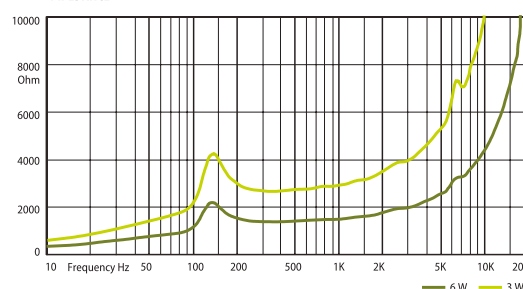

Technical Specifications	iSpeak 6
Rated power	6 W
Transformer power taps	6 W - 3 W
Sensitivity	92 dB (1 W/1 m)
Maximum SPL	99 dB (Pmax/1 m) at 2491 Hz
Frequency response	130 Hz – 17 kHz
Dispersion at 1000 Hz	180° (H), 140° (V)
Driver size	5,5" (139 mm)
Dimensions	166 mm x 267 mm x 80 mm
Weight	1 kg
Material	High impact polystyrene plastic, steel grill
Colour	Papyrus white (RAL 9018), white (RAL 9016)