

CEILING LOUDSPEAKERS

# MC Voice Evacuation Speaker According EN54-24 Standard


Metal ceiling loudspeakers with ABS plastic dome equipped with 100V transformer, ceramic terminal and thermal fuse.

## MC 4EN


MC 4EN is designed for use in voice evacuation and voice alarm applications for clear and intelligible speech announcements. Quick fit clamps allow easy and fast installation into false ceilings. High sound pressure level SPL and optimized middle frequency sound reproduction ensures reliable operation in case of an emergency situation. Conforms EN54-24 standard.




HORIZONTAL / VERTICAL POLAR DIAGRAMS

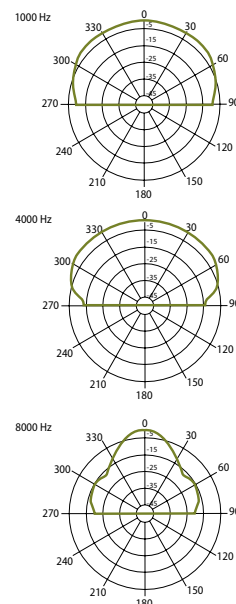

FREQUENCY RESPONSE

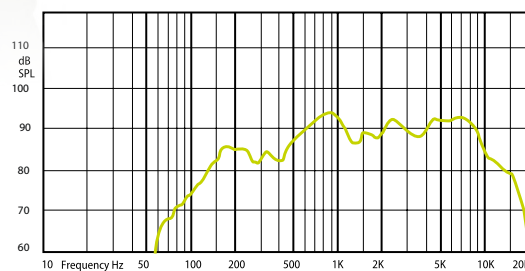

IMPEDANCE

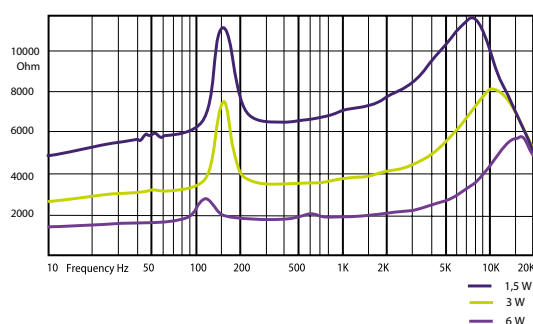

Technical Specifications	MC 4EN
Rated power	6 W
Transformer power taps	6 W - 3 W - 1,5 W
Sensitivity	90 dB (1W/1m)
Maximum SPL	98 dB (Pmax/1m) at 1 kHz
Frequency response	110 Hz - 15 kHz
Dispersion at 1000 Hz	165° Conical
Driver dimensions	4" (100 mm)
Dimensions	ø 181 mm x 65 mm
Weight	0,9 kg
Material	Steel
Colour	White (RAL 9016)