

## CEILING LOUDSPEAKERS

# PCR Rimless Plastic Ceiling Loudspeakers



ABS plastic ceiling loudspeakers with integrated 100 V line transformer.

# PCR 2T


PCR 2T small size plastic ceiling loudspeaker with rimless grill. Integrated 100 V power transformer for 6W, 3W or 1.5W power output, spring loaded connection terminal for quick installation without tools. Suitable design for public spaces, where ceilings are relatively low and interiors are sensitive to any kind of external influence. High quality 2.5" driver has good frequency response for paging and background music applications.




HORIZONTAL / VERTICAL POLAR DIAGRAMS

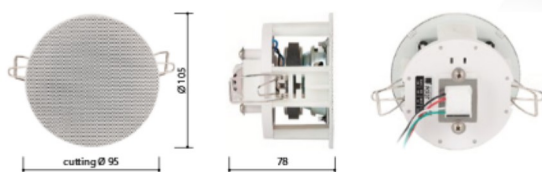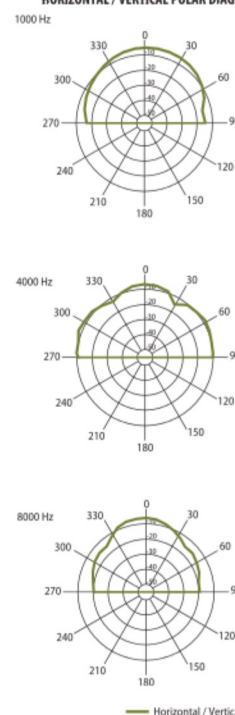

FREQUENCY RESPONSE

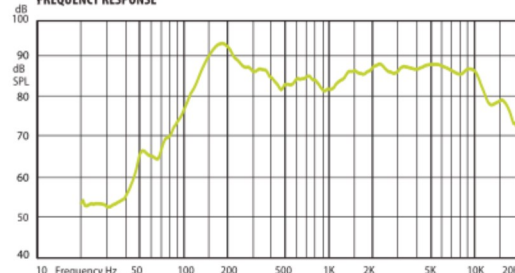

IMPEDANCE

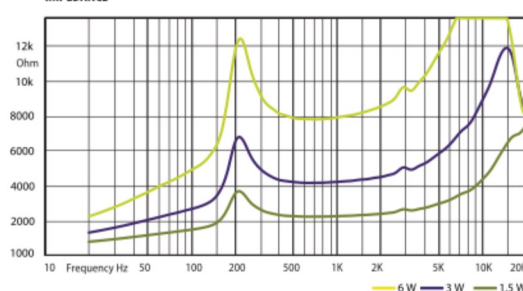

Technical Specifications	PCR 2T
Rated power	6W
Transformer power taps	6W - 3W - 1.5W
Sensitivity	86 dB (1 W/1 m)
Maximum SPL	92 dB (Pmax/1 m) at 190 Hz
Frequency response	200 Hz – 16 kHz
Dispersion at 1000 Hz	120° conical
Driver dimensions	2.5"
Dimensions	ø 105 mm x 78 mm
Weight	0.45 kg
Material	ABS plastic, powder coated iron mesh grill
Colour	White (RAL 9016)