

HDMI to 3G/HD/SD-SDI Converter


VC840

- The VC840 HDMI to 3G/HD/SD SDI Converter provides a professional way to exchange high definition signals in real time. The SDI and HDMI signal conversion is 100% digital and guarantees no loss of quality for both the audio and video transmission. The VC840 provides 2 low jitter SDI outputs for dual display. The VC840 is the most dependable way to convert signals with confidence when monitoring in any post or broadcast application.



Features

- Converts an HDMI input signal to 3G/HD/SD-SDI formats in real time while avoiding transformation loss for both audio and video signals
- Supports additional analog stereo audio and coaxial digital audio
- HDMI (Deep Color)
- LED indication of power and signal status
- Supports an SDI distance of up to 90M (3G-SDI), 150M (HD-SDI) or 300M (SD-SDI) of RG6
- Supported SDI formats:
 - SD-SDI (SMPTE 259M, up to 270Mbps)
 - HD-SDI (SMPTE 292M, 296M, up to 1.485Gbps)
 - 3G-SDI (SMPTE 424M, 425M level A, up to 2.97Gbps)
- Video Support:
 - 525i@59.96, 625i@50
 - 720p@50/59.94/60
 - 1080i@50/59.94/60
 - 1080p@23.97/24/25/29.97/30/50/59.94/60
- Supports 8 audio channels @ 48kHz rate
- Offers 2 low-jitter SDI outputs for dual display
- Features automatic detection of 3G/HD/SD-SDI signals
- Reclocking SDI signals for cascading and thus longer transmission
- Locking power connector for secure communications
- Selectable EDID settings and EDID learning mode

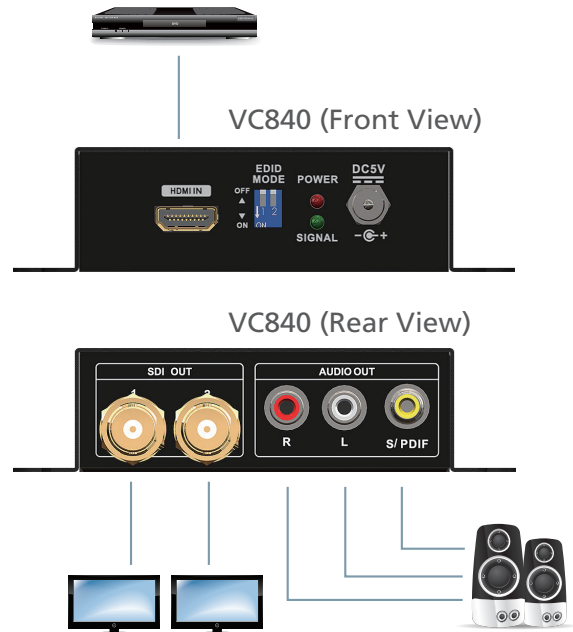

Specifications

Function		VC840		
Connectors	Input	HDMI In		
	Output	SDI Out	1 x HDMI Type A Female (Black)	
		Audio	Analog	2 x BNC (Gold)
			Digital	2 x RCA (Red/White)
				1 x RCA (Yellow)
Power	1 x DC Jack			
Switches	EDID Mode	2 x Dip Switch		
LEDs	Power	1 (Red)		
	Signal	1 (Green)		
Power Consumption		DC5V, 3.5W		
Environment	Operating Temp.	0-40°C		
	Storage Temp.	-20~60°C		
	Humidity	20~90% RH, Non-condensing		
Physical Properties	Housing	Metal		
	Weight	0.29 kg		
	Dimensions(L x W x H)	12.22 x 10.70 x 3.04 cm		

Product information is subject to change without prior notice.

ATEN International Co., Ltd.

3F., No.125, Sec. 2, Datong Rd., Sijhih District., New Taipei City 221, Taiwan
 Phone: 886-2-8692-6789 Fax: 886-2-8692-6767
 www.aten.com E-mail: marketing@aten.com

Publish Date: 01/2020 V1.0



© Copyright 2020 ATEN® International Co., Ltd.
 ATEN and the ATEN logo are trademarks of ATEN International Co., Ltd.
 All rights reserved. All other trademarks are the property of their respective owners.