


innex CT Series

Step Into the Future Collaboration

Top level security touch display for corporations!

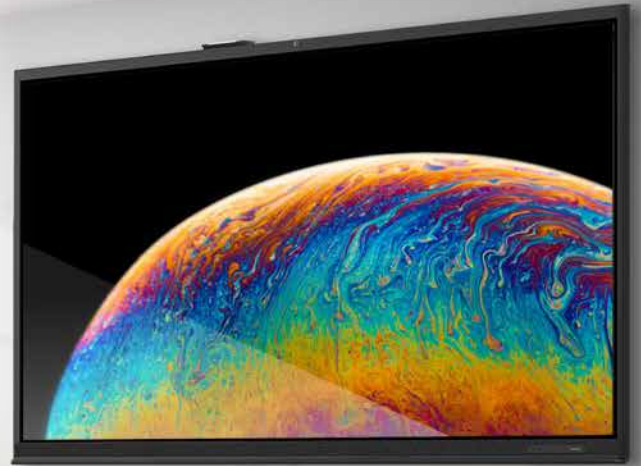

Responsive
Touch



Wide Color
Gamut



Windows Ink
Compatible



AI Camera &
8 Mics




Wireless
Conferencing



User-Centered
Design



Top-Level
Security



Why Choose the CT Series?

Stunning Visuals

QLED technology brings a heightened level of brightness, color accuracy, and detail, ensuring your presentations look crisp and professional.

Effortless Connectivity

The Connect Pro Button wirelessly shares your screen to the CT display and uses the CT display's camera and microphones—no cables needed.

Dynamic Collaboration

The CT display with Connect Pro offers real-time interaction through touch-back control and MPP support, making meetings more engaging and seamless.

Contact

 funtechinnovation.com

 info@funtechinnovation.com

Follow us




Connect Instantly, Present Seamlessly!

Empower your team with the CT Series, designed for effortless engagement and seamless presentations. Featuring an integrated AI camera, microphones, speakers, and Connect Pro, it enables productive hybrid meetings and blended learning. With just a click, connect your laptop, share your screen wirelessly, and access the AI camera and 8-mic array, all without any cables.



Connect Pro

Plug the Connect Pro Button into your laptop's USB-C port and connect it to the receiver via Wi-Fi for seamless screen sharing. No cables are required, click for wireless presentation.

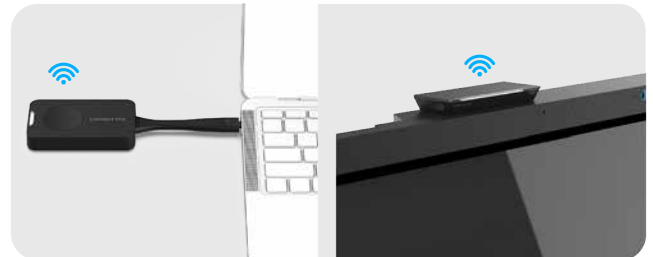

Integrated AI Camera and Premium Sound Quality

Premium built-in 8 microphones array and powerful speaker for full-room coverage. 120° Wide-angle camera featuring AI video modes including smart gallery, speaker tracking, and auto-framing.



Collaborate and Create with Windows Ink

Effortlessly collaborate by annotating, marking up, and highlighting content on platforms like Windows Whiteboard, Office365, or Windows Ink. The intuitive touch functionality allows you to use your fingers, the included pen for precise writing, and even your palm as an eraser.



Ultimate Wireless BYOD Solution!


Experience seamless collaboration with Connect Pro, AirPlay, Miracast, and Chromecast for effortless screen sharing from any device. With multi-screen sharing, multiple users can present simultaneously, enhancing teamwork and boosting productivity.



Plug and play Connect Pro Button



Airplay/ Miracast/ Chromecast

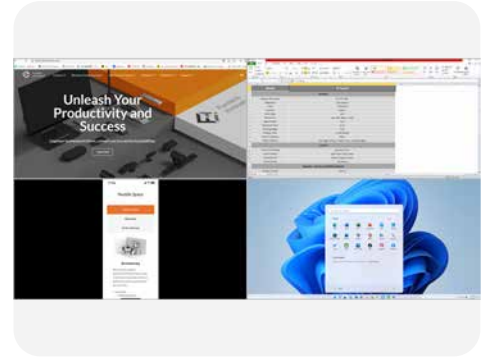

Multi-Screen Sharing



Wireless Conferencing with Camera Streaming

Wirelessly access the built-in camera and 8-microphone array from your laptop with high clarity using the Connect Pro Button or our software. Effortlessly integrate all your conference call software for enhanced collaboration, making presentations and video calls smoother than ever with seamless connectivity and stunning visuals.



Security Meets Convenience

With the bundled Connect Pro dongles, you can wirelessly display content and data directly from your laptop in seconds. This eliminates the need for last-minute file transfers and reduces the risk of cloud drive password leaks when typing on an on-screen keyboard. Plus, it helps prevent unauthorized breaches by ensuring you don't forget to log off before the next user accesses the system.

Touchback Control with Microsoft Pen Protocol Support

Screen sharing with the Connect Pro Button, backed by MPP protocol support and touchback control, guarantees compatibility with Microsoft Office Suites, Whiteboard, OneNote, Edge and more.



innexCT Series **SPECS**

(In U.S. Customary Units)

Model		CT 65	CT 75	CT 86
Display	Display Dimension	65"	75"	86"
	Brightness	450 Typical		
	Viewing Angle	178°		
	Contrast	1200:1		
	Dynamic Contrast	5000:1		
	Glass Hardness	8H		
	Glass Thickness	0.12 in		
	Bonding Type	Zero bonding		
	Back-Light	LED		
	Resolution	Ultra HD 3840 x 2160		
	Aspect Ratio	16:9		
	Response Time	8ms Typical		
	Color	Wide Color Gamut NTSC 105%		
	Display Color	1.07B (8bits + FRC)		
	Panel Frequency	60Hz		
	Flicker Free	Yes		
Touch/ Interactive	Touch Technology	Infrared Touch		
	Touch Points	40 Points		
	Accuracy	± 0.04 in (Over 90% area)		
	Minimum Object Size	0.10 in		
	Touch Resolution	32768 x 32768		
	Touch Surface	Anti-Glare		
	Microsoft Pen Protocol Support	Yes		
	Touch Tool	Stylus, Finger, Palm Eraser		
	Pen Type	Passive Pen		
	Pen Tip Diameter	0.12 in / 0.31 in		
	Palm Rejection	Yes		
	Tracking Rate	≤ 5ms		
	Single point scan time	≥ 200Hz		
Speaker, Camera and Microphone	Speaker Output	15W x 2		
	Camera	8MP AI 4K 120°		
	Camera Features	Gallery/ Speaker tracking/ Auto framing/ Manual mode/ EPTZ function		
	Microphone	8 Mic Array with AGC / ANR / AEC		
I/O Ports	Front	USB-A x2 (USB 3.0, Dynamic)		
		USB-C x1 (DP Alt 1.4 4K@60 in, USB 2.0, PD 20V/3.25A)		
	Rear	HDMI In x2		
		HDMI Out x1		
		USB-A x2 (USB 3.0, Dynamic)		
		USB-C x1 (DP Alt 1.4 4K@60 in, USB 2.0)		
		USB-B for Touch x1 (USB 3.0)		
		USB-A 2.0 x1 (for service only)		
		SPDIF Out x1		
		RS232 x1		
		OPS Slot x1		
		AC In x1		
	Top	HDMI (For Connect Pro Receiver only) x1 (HDMI with Power 5V/3A, USB 2.0)		

innexCT Series **SPECS**

(In U.S. Customary Units)

Model		CT 65	CT 75	CT 86
Wireless Conferencing System	Device	Connect Pro Receiver		
	Protocol	Connect Pro Button, Airplay, Miracast, Chromecast		
Power	Power Supply	100V - 240V AC		
	Consumption	Maximum ≤ 250W	Maximum ≤ 350W	Maximum ≤ 450W
	Standby Mode	Yes		
Operating & Storage Environment	Operating Temperature	32 °F ~ 113 °F		
	Storage Temperature	-4 °F ~ 140 °F		
	Operating Humidity	10% - 90%		
	Storage Humidity	10% - 90%		
Physical Spec	Product Dimension (without Connect Pro Receiver)	59.1 x 36.6 x 6.7 in	67.9 x 41.5 x 6.7 in	77.6 x 46.9 x 6.7 in
	Package Dimension	62.2 x 8.7 x 39.4 in	70.5 x 8.7 x 45.9 in	80.5 x 8.7 x 50.4 in
	Net Weight	79.4 lbs	105.8 lbs	133.4 lbs
	Gross Weight	100.3 lbs	132.3 lbs	164.2 lbs
	VESA Mount Point	19.7 x 15.7 in	23.6 x 15.7 in	31.5 x 15.7 in
Accessories	Connect Pro	Connect Pro Receiver x 1, Connect Pro Button x 2		
	Accessory Box	Remote control x1, IR pen x2, Warranty Card, M3 screw x2 (for Connect Pro Receiver), Quick start guide, Safety documents		
	Accessory Bag	4.9 ft HDMI Cable x1, 4.9 ft USB B-A Cable x1, 9.8 ft USA Power Cable x1, 9.8 ft EU Power Cable x1, 9.8 ft UK Power Cable x1, 9.8 ft INDIA Power Cable x1 (optional), Wall anchor x8, Self-tapping screw x8		
Compliance & Certification	Regulatory Certification	CE, FCC		

innexCT Series **SPECS**

(In Metric Units)

Model		CT 65	CT 75	CT 86
Display	Display Dimension	65"	75"	86"
	Brightness	450 Typical		
	Viewing Angle	178°		
	Contrast	1200:1		
	Dynamic Contrast	5000:1		
	Glass Hardness	8H		
	Glass Thickness	3.2 mm		
	Bonding Type	Zero bonding		
	Back-Light	LED		
	Resolution	Ultra HD 3840 x 2160		
	Aspect Ratio	16:9		
	Response Time	8ms Typical		
	Color	Wide Color Gamut NTSC 105%		
	Display Color	1.07B (8bits + FRC)		
	Panel Frequency	60Hz		
	Flicker Free	Yes		
Touch/ Interactive	Touch Technology	Infrared Touch		
	Touch Points	40 Points		
	Accuracy	± 1 mm (Over 90% area)		
	Minimum Object Size	2.5 mm		
	Touch Resolution	32768 x 32768		
	Touch Surface	Anti-Glare		
	Microsoft Pen Protocol Support	Yes		
	Touch Tool	Stylus, Finger, Palm Eraser		
	Pen Type	Passive Pen		
	Pen Tip Diameter	3 mm / 8mm		
	Palm Rejection	Yes		
	Tracking Rate	≤ 5ms		
	Single point scan time	≥ 200Hz		
Speaker, Camera and Microphone	Speaker Output	15W x 2		
	Camera	8MP AI 4K 120°		
	Camera Features	Gallery/ Speaker tracking/ Auto framing/ Manual mode/ EPTZ function		
	Microphone	8 Mic Array with AGC / ANR / AEC		
I/O Ports	Front	USB-A x2 (USB 3.0, Dynamic)		
		USB-C x1 (DP Alt 1.4 4K@60 in, USB 2.0, PD 20V/3.25A)		
	Rear	HDMI In x2		
		HDMI Out x1		
		USB-A x2 (USB 3.0, Dynamic)		
		USB-C x1 (DP Alt 1.4 4K@60 in, USB 2.0)		
		USB-B for Touch x1 (USB 3.0)		
		USB-A 2.0 x1 (for service only)		
		SPDIF Out x1		
		RS232 x1		
		OPS Slot x1		
		AC In x1		
	Top	HDMI (For Connect Pro Receiver only) x1 (HDMI with Power 5V/3A, USB 2.0)		

innexCT Series **SPECS**

(In Metric Units)

Model		CT 65	CT 75	CT 86
Wireless Conferencing System	Device	Connect Pro Receiver		
	Protocol	Connect Pro Button, Airplay, Miracast, Chromecast		
Power	Power Supply	100V - 240V AC		
	Consumption	Maximum ≤ 250W	Maximum ≤ 350W	Maximum ≤ 450W
	Standby Mode	Yes		
Operating & Storage Environment	Operating Temperature	0 °C~ 45 °C		
	Storage Temperature	-20 °C~ 60 °C		
	Operating Humidity	10% - 90%		
	Storage Humidity	10% - 90%		
Physical Spec	Product Dimension (without Connect Pro Receiver)	1502 x 929 x 169 mm	1724 x 1054 x 170 mm	1970 x 1192 x 170 mm
	Package Dimension	1580 x 220 x 1000 mm	1790 x 220 x 1165 mm	2044 x 220 x 1280 mm
	Net Weight	36 kg	48 kg	60.5 kg
	Gross Weight	45.5 kg	60 kg	74.5 kg
	VESA Mount Point	500 x 400 mm	600 x 400 mm	800 x 400 mm
Accessories	Connect Pro	Connect Pro Receiver x 1, Connect Pro Button x 2		
	Accessory Box	Remote control x1, IR pen x2, Warranty Card, M3 screw *2 (for Connect Pro Receiver), Quick start guide, Safety documents		
	Accessory Bag	1.5M HDMI Cable x1, 1.5M USB B-A Cable x1, 3M USA Power Cable x1, 3M EU Power Cable x1, 3M UK Power Cable x1, 3M INDIA Power Cable x1 (optional), Wall anchor x8, Self-tapping screw x8		
Compliance & Certification	Regulatory Certification	CE, FCC		