

THE MOST OPTIMIZED  
TOUR GUIDE SYSTEM

# TelMe - XT / TelMe - XR



TelMe - XT

TelMe - XR





World wide Compatible  
2.4GHz ISM Band Solution

Two Guide Transmitting per  
CH Simultaneously - Standard

Two Guide Intercom per  
CH in Full duplex - Optional  
with EHR01 Ear set Boom Microphone

Long enough Talk range  
over 170m typical

Crystal clear sound quality  
& Loud enough Audio output



# Two Guides Transmit per CH Simultaneously over 100 CHs - Standard Package



# Two Guides Intercom per CH in Full duplex over 100 CHs - Optional with EHR01, Earset Boom Microphone





## TelMe - XT, Transmitter



- Microphone Input + Aux In port per unit
- Publishing with any kinds of favorite music back ground
- Direct Mute On/Off & 5 steps Microphone sensitivity control
- Longer than 10 Hours battery operation time
- Convenient Micro USB + Drop In contact rechargeable system

## TelMe - XR, Receiver



- Crystal clear sound quality and Loud enough Audio out put with 9 steps contral
- Two Earphone out put port Ear.1 & Ear.2 per unit
- Longer than 15 Hours battery operation time
- Unlimited installation of Receiver per CH over 100 available channels

# Retail Package

## TelMe-XT, Package & Standard Accessories inside



TelMe-XT,



PM-01,  
Microphone

NS-01,  
Neck strap


UC-01,  
USB Charging cable

Package

## TelMe - XR, Package & Standard Accessories inside



TelMe-XT,

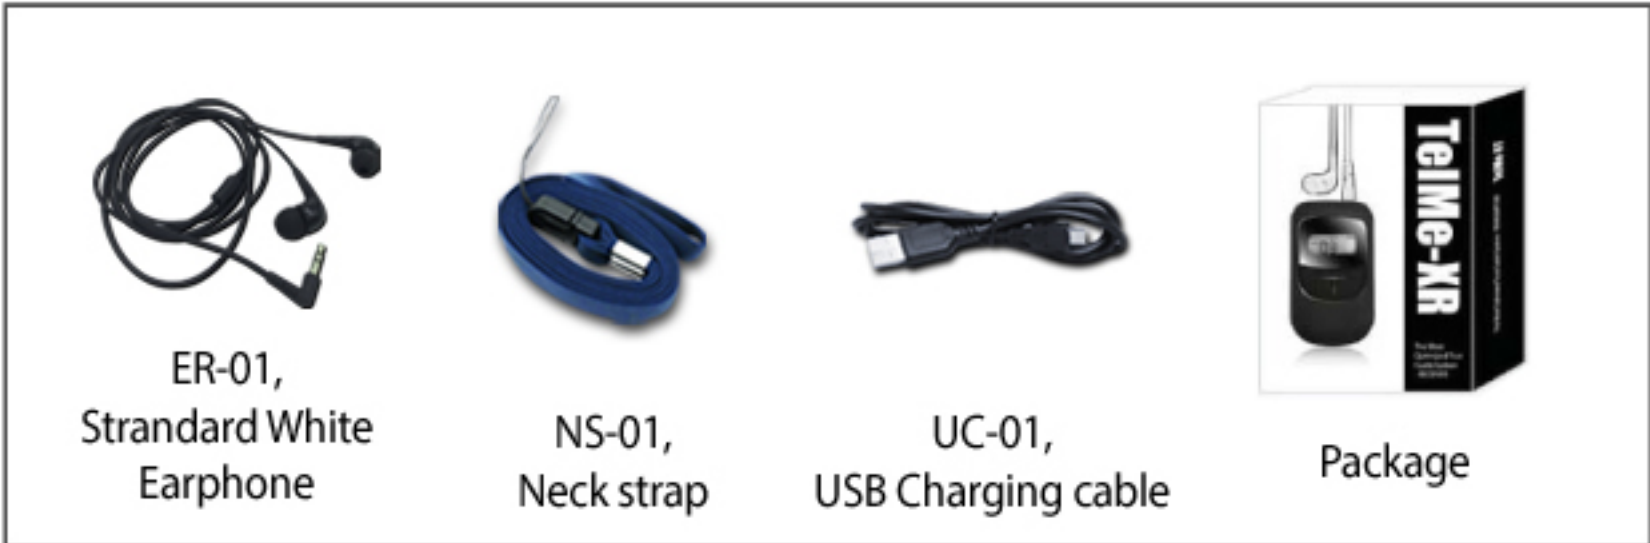

ER-01,  
Standard White  
Earphone

NS-01,  
Neck strap

UC-01,  
USB Charging cable

Package



Tour Guide



Interpretation



Hearing Aid at Semina



Group Community



# Various Range of Optional Accessories



Model ; PM01  
Plug type Microphone



Model ; HSB-01  
Head set Boom Microphone



Model ; ER01  
Standard Ear phone



Model ; BC-01  
Belt Clip Cradle



Model ; ER01B  
Super sound Quality Ear phone



Model ; RCA01  
RCA Adapter



Model ; UC01  
USB Charging Cable



Model ; EC01  
Extension Cable



Model ; EHE01  
Ear Holder Type Ear Phone



Model ; CB20D  
Drop in Charging container for 20 units  
Input;AC100~200v, Output;DC5V/5A  
Charging current/Time;220mA typ. / 6 Hour  
Dimension;54x28.5x15cm  
Weight;4.6kg without units



Model ; EHE01D  
Super Sound Quality Ear Holder Type  
Ear phone



Model ; CB40D  
Charging container for 40 units  
Input;AC 100~220V, Output;DC 5V/5A  
Charging current/Time; 220mA typ. / 6 Hour  
Dimension; 63 x 42 x 15cm  
Weight; 6.1kg without units



Model ; CM01  
Clip type Microphone with 1.2m cable



Model ; CS-20  
20 Bay Drop in Charging stationary



Model ; AM01  
Arm Band Holder Breathable  
fabric with stretch



Model ; CS-02  
2 Bay Drop-in Charging Cradle



Model ; EHR01  
Ear Head-Set with Boom Microphone



Model ; CB-48  
Carrying Bag for 48 units

## Product Specification

Radio Frequency Type	ISM 2403MHz ~ 2480MHz
Radio Interface	ISM 2.4GHz : GFSK Modulation with Frequency Hopping
Voice Codec	16KHz / 16bits
Tx Max Output Power	10mW
Rx Sensitivity	-95dBm
Voice Latency	< 20ms
Num. of Frequency Channel	100Chs
Channel Spacing	500KHz
Data Rate	500Kbps
Freq. Bandwidth	500KHz
Battery	Li-ion Battery @ 3.7 V 800mA
Working Time	TelMe-XT ; 10H, TelMe-XR ; 15H
Frequency response	50Hz ~ 8kHz
Dimension / Weight	50 mm x 88 mm x 15 mm / 60g

Made in Korea