


# MA-808

## Portable Wireless PA System

Weighting under 20kg and delivering a huge 250 watts of power, the MIPRO MA-808 has set a new benchmark for performance in Portable Public Address Systems.

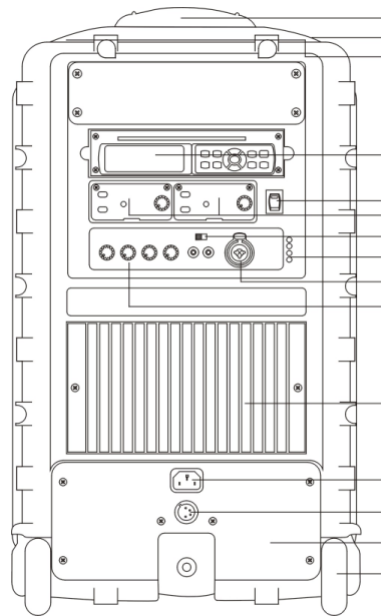

- Fixed Handle
- Retractable Carry Handle
- Transmitters Storage
- Optional Skip-free CD/ MP3/ SD Player & Recorder
- Power Switch
- two 16-channel AutoScan & ACT Receiver
- VOP (Voice over Music) switch
- Battery Fuel gauge
- Universal Mic Input Socket
- Master Control Panel
- Heat sink
- AC Switching Power Input Socket
- DC Input Jack
- Built-in dual Rechargeable Batteries
- Sturdy Trolley Wheels

### Ideal Applications

Ideal for large-scale gatherings such as schools, places of worship, sporting events, corporate & shopping center presentations, military, law enforcement events, trade shows, fitness clubs, auctions, election campaigns, hotels, theme parks.

### Key Features

- Lightweight, rugged design with 250-watt powerful sound.
- Class D/AB amplifiers drive 10" woofer & 1.5" titanium compression driver.
- Industry's only dual diversity receivers with automatically scannable frequencies and ACT technology.
- Latest technology to detect and eliminate unwanted interference.
- Optional skip-free CD/MP3/SD player & recorder.
- 6~8 hours continuous use per charge.
- Smart 4-segment rechargeable battery "fuel gauge"
- Voice over music priority features.
- Built-in storage compartment.
- For crowds up to 2,000

### Wireless Microphones

- MRM-70 16-channel Diversity Receiver Module
- ACT-707HE Handheld Transmitter Microphone
- ACT-707TE Body-pack Transmitter
- MU-53L Uni-directional Lavalier Microphone
- MU-53HN Uni-directional Headset Microphone

### Accessories

- CDM-3 CD/MP3/SD card player & recorder.
- SC-80 Storage bag
- MS-70 Tripod speaker stand
- MB-70 12V, 4.5 AH rechargeable gel cell battery

### Specifications

AF Power Output:	250W, HF 8 / LF 4
Frequency Response:	50Hz ~18KHz
Mic Input:	Mic Input: 6.3mm / 1/4" (unbalanced) Mic Input: Combo Jack (balanced, XLR)
Battery Type:	2 Rechargeable Gel Cells 12V, 4.5Ah (Included)
Operation Time:	6~8 hours per charge
Receiver Channels:	UHF 16 Scannable frequencies
T.H.D.:	< 1%
Treble Speaker	1.5" Titanium Compression Driver
Bass Speaker	10" Neodymium Cone Driver
Line Inputs:	RCA jacks – Line-inputs (Stereo)
Line Outputs:	RCA jacks – Line-outputs
Power Supply:	Built-in 12V/4.5AH rechargeable battery, charger & 90~264V AC switching power supply
Dimensions:	360 (W) x 560(H) x 350(D)mm 14.2 (W) x 22.0(H) x 13.8(D)"
Weight:	20.5 kg / 45.2 lbs



Specifications subject to change without notice