


## UHD35

4K UHD gaming and home entertainment projector







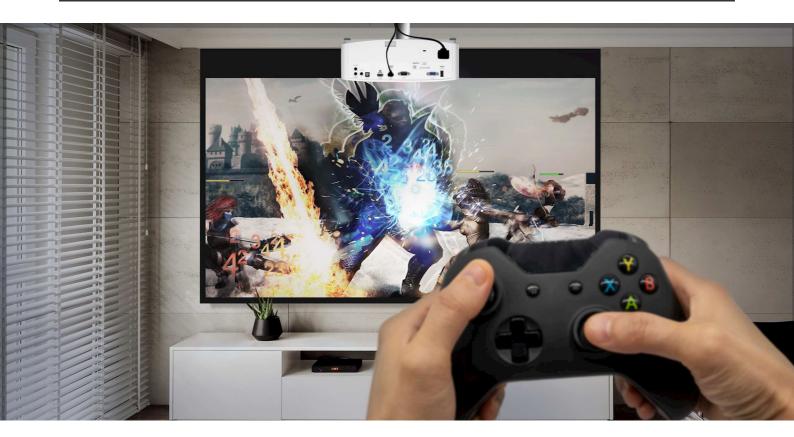

- 4K UHD resolution HDR and HLG compatible
- Lights on viewing 3600 lumens
- Supports 1080p 240Hz for smooth gaming and an ultra-low input lag of 4.2ms
- Full 3D compatible

Immerse yourself in a world of Ultra HD gaming, live sports, TV shows and movies. The UHD35 delivers impressive 4K cinema-quality images, lightning-fast input lag as low as 4.2ms and a high refresh rate of 240Hz for silky smooth gaming.

TV and movie fans can also enjoy excellent colour depth, crystal clear detail, and sparkling contrast for a stunningly immersive experience.

Packed with the latest technology and features, this stylish projector boasts High Dynamic Range (HDR) and HLG compatibility, Full 3D and two HDMI 2.0 ports. Perfect for enjoying life-like big-screen entertainment in any living space.



## **Specifications**

Specifications	
Display/image	
Display technology	DLP
Resolution	UHD (3840x2160)
Brightness	3,600 lumens
Contrast ratio	1,000,000:1
Native aspect ratio	16:9
Aspect ratio - compatible	4:3
Keystone correction -	+/-40°
horizontal	17-40
Keystone correction -	+/-40°
vertical	
Horizontal scan rate	31 ~ 135Khz
Vertical scan rate	24 ~ 120Hz
Uniformity	80%
Screen size	0.84m ~ 7.62m (33" ~ 300") diagonal
Lamp info	
Light source type	Lamp
Lamp watts	240
Lamp life hours (up to)	4000 (Bright), 15000 (Dynamic), 10000 (Eco)
Optical	
Throw ratio	1.5:1 ~ 1.66:1
Projection distance (m)	1.21m - 9.9m
Zoom	1.1
Zoom type	Manual
Focal length (mm)	15.84 mm~17.42mm/0.624"~0.686"
Lens shift	Vertical +0%
Native offset	105%
Connectivity	
Connections	Inputs 2 x HDMI 2.0, 1 x VGA (YPbPr/RGB), 1 x Audio
	3.5mm
	Outputs 1 x Audio 3.5mm, 1 x S/PDIF, 1 x USB-A power
	1.5A
	Control 1 x RS232, 1 x 12V trigger
General	
Noise level (typical)	26dB
Noise level (max)	28dB
PC compatibility	UHD, WQHD, WUXGA, FHD, UXGA, SXGA, WXGA, HD,
· · · · · · · · · · · · · · · · · · ·	XGA, SVGA, VGA, Mac
2D compatibility	480i/p, 576i/p, 720p(50/60Hz), 1080i(50/60Hz),
	1080p(50/60Hz), 2160p(50/60Hz)
3D compatibility	Frame-pack: 1080p24, 720p50 / 60
3D	
OD	Full 3D
Security	
	Full 3D Security bar, Kensington Lock, Password protected interface 10 languages: English, French, German, Italian, Japanese,
Security OSD / display languages	Full 3D Security bar, Kensington Lock, Password protected interface 10 languages: English, French, German, Italian, Japanese, Portuguese, Russian, Chinese (simplified), Spanish
Security	Full 3D Security bar, Kensington Lock, Password protected interface 10 languages: English, French, German, Italian, Japanese, Portuguese, Russian, Chinese (simplified), Spanish 5°C~40°C/41°F~104°F, max altitude 3000M/9843ft, max
Security OSD / display languages Operating conditions	Full 3D Security bar, Kensington Lock, Password protected interface 10 languages: English, French, German, Italian, Japanese, Portuguese, Russian, Chinese (simplified), Spanish 5°C~40°C/41°F~104°F, max altitude 3000M/9843ft, max humidity 85%
Security OSD / display languages Operating conditions Remote control	Full 3D Security bar, Kensington Lock, Password protected interface 10 languages: English, French, German, Italian, Japanese, Portuguese, Russian, Chinese (simplified), Spanish 5°C~40°C/41°F~104°F, max altitude 3000M/9843ft, max humidity 85% Backlit home remote
Security OSD / display languages Operating conditions Remote control Speaker count	Full 3D Security bar, Kensington Lock, Password protected interface 10 languages: English, French, German, Italian, Japanese, Portuguese, Russian, Chinese (simplified), Spanish 5°C-40°C/41°F-104°F, max altitude 3000M/9843ft, max humidity 85% Backlit home remote 1
Security OSD / display languages Operating conditions Remote control Speaker count Watts per speaker	Full 3D Security bar, Kensington Lock, Password protected interface 10 languages: English, French, German, Italian, Japanese, Portuguese, Russian, Chinese (simplified), Spanish 5°C~40°C/41°F~104°F, max altitude 3000M/9843ft, max humidity 85% Backlit home remote 1 10W
Security OSD / display languages Operating conditions Remote control Speaker count	Full 3D Security bar, Kensington Lock, Password protected interface 10 languages: English, French, German, Italian, Japanese, Portuguese, Russian, Chinese (simplified), Spanish 5°C-40°C/41°F~104°F, max altitude 3000M/9843ft, max humidity 85% Backlit home remote 1 10W AC power cord
Security OSD / display languages Operating conditions Remote control Speaker count Watts per speaker	Full 3D Security bar, Kensington Lock, Password protected interface 10 languages: English, French, German, Italian, Japanese, Portuguese, Russian, Chinese (simplified), Spanish 5°C-40°C/41°F~104°F, max altitude 3000M/9843ft, max humidity 85% Backlit home remote 1 10W AC power cord Remote control
Security OSD / display languages Operating conditions Remote control Speaker count Watts per speaker	Full 3D Security bar, Kensington Lock, Password protected interface 10 languages: English, French, German, Italian, Japanese, Portuguese, Russian, Chinese (simplified), Spanish 5°C-40°C/41°F~104°F, max altitude 3000M/9843ft, max humidity 85% Backlit home remote 1 10W AC power cord
Security OSD / display languages Operating conditions Remote control Speaker count Watts per speaker In the box	Full 3D Security bar, Kensington Lock, Password protected interface 10 languages: English, French, German, Italian, Japanese, Portuguese, Russian, Chinese (simplified), Spanish 5°C-40°C/41°F-104°F, max altitude 3000M/9843ft, max humidity 85% Backlit home remote 1 10W AC power cord Remote control 2x AAA batteries
Security OSD / display languages Operating conditions Remote control Speaker count Watts per speaker In the box	Full 3D Security bar, Kensington Lock, Password protected interface 10 languages: English, French, German, Italian, Japanese, Portuguese, Russian, Chinese (simplified), Spanish 5°C-40°C/41°F-104°F, max altitude 3000M/9843ft, max humidity 85% Backlit home remote 1 10W AC power cord Remote control 2x AAA batteries Basic user manual
Security OSD / display languages Operating conditions Remote control Speaker count Watts per speaker In the box Input lag Power	Full 3D Security bar, Kensington Lock, Password protected interface 10 languages: English, French, German, Italian, Japanese, Portuguese, Russian, Chinese (simplified), Spanish 5°C-40°C/41°F-104°F, max altitude 3000M/9843ft, max humidity 85% Backlit home remote 1 10W AC power cord Remote control 2x AAA batteries Basic user manual
Security OSD / display languages Operating conditions Remote control Speaker count Watts per speaker In the box  Input lag Power Power supply	Full 3D Security bar, Kensington Lock, Password protected interface 10 languages: English, French, German, Italian, Japanese, Portuguese, Russian, Chinese (simplified), Spanish 5°C~40°C/41°F~104°F, max altitude 3000M/9843ft, max humidity 85% Backlit home remote 1 10W AC power cord Remote control 2x AAA batteries Basic user manual 4.20ms
Security OSD / display languages Operating conditions Remote control Speaker count Watts per speaker In the box Input lag Power	Full 3D Security bar, Kensington Lock, Password protected interface 10 languages: English, French, German, Italian, Japanese, Portuguese, Russian, Chinese (simplified), Spanish 5°C~40°C/41°F~104°F, max altitude 3000M/9843ft, max humidity 85% Backlit home remote 1 10W AC power cord Remote control 2x AAA batteries Basic user manual 4.20ms
Security OSD / display languages Operating conditions Remote control Speaker count Watts per speaker In the box  Input lag Power Power supply Power consumption	Full 3D Security bar, Kensington Lock, Password protected interface 10 languages: English, French, German, Italian, Japanese, Portuguese, Russian, Chinese (simplified), Spanish 5°C~40°C/41°F~104°F, max altitude 3000M/9843ft, max humidity 85% Backlit home remote 1 10W AC power cord Remote control 2x AAA batteries Basic user manual 4.20ms
Security OSD / display languages Operating conditions Remote control Speaker count Watts per speaker In the box  Input lag Power Power supply Power consumption (standby)	Full 3D Security bar, Kensington Lock, Password protected interface 10 languages: English, French, German, Italian, Japanese, Portuguese, Russian, Chinese (simplified), Spanish 5°C-40°C/41°F-104°F, max altitude 3000M/9843ft, max humidity 85% Backlit home remote 1 10W AC power cord Remote control 2x AAA batteries Basic user manual 4.20ms  100 ~ 240V, 50 ~ 60Hz 0.5W
Security OSD / display languages Operating conditions Remote control Speaker count Watts per speaker In the box  Input lag Power Power supply Power consumption (standby) Power consumption (min)	Full 3D Security bar, Kensington Lock, Password protected interface 10 languages: English, French, German, Italian, Japanese, Portuguese, Russian, Chinese (simplified), Spanish 5°C-40°C/41°F-104°F, max altitude 3000M/9843ft, max humidity 85% Backlit home remote 1 10W AC power cord Remote control 2x AAA batteries Basic user manual 4,20ms  100 ~ 240V, 50 ~ 60Hz 0.5W 220W
Security OSD / display languages Operating conditions Remote control Speaker count Watts per speaker In the box  Input lag Power Power supply Power consumption (standby) Power consumption (min) Power consumption (max)	Full 3D Security bar, Kensington Lock, Password protected interface 10 languages: English, French, German, Italian, Japanese, Portuguese, Russian, Chinese (simplified), Spanish 5°C-40°C/41°F-104°F, max altitude 3000M/9843ft, max humidity 85% Backlit home remote 1 10W AC power cord Remote control 2x AAA batteries Basic user manual 4,20ms  100 ~ 240V, 50 ~ 60Hz 0.5W 220W

5.1 kg

3.9 kg

Gross weight

Net weight



