


# ZK1320

4K UHD+ High Brightness ProAV Laser Projector

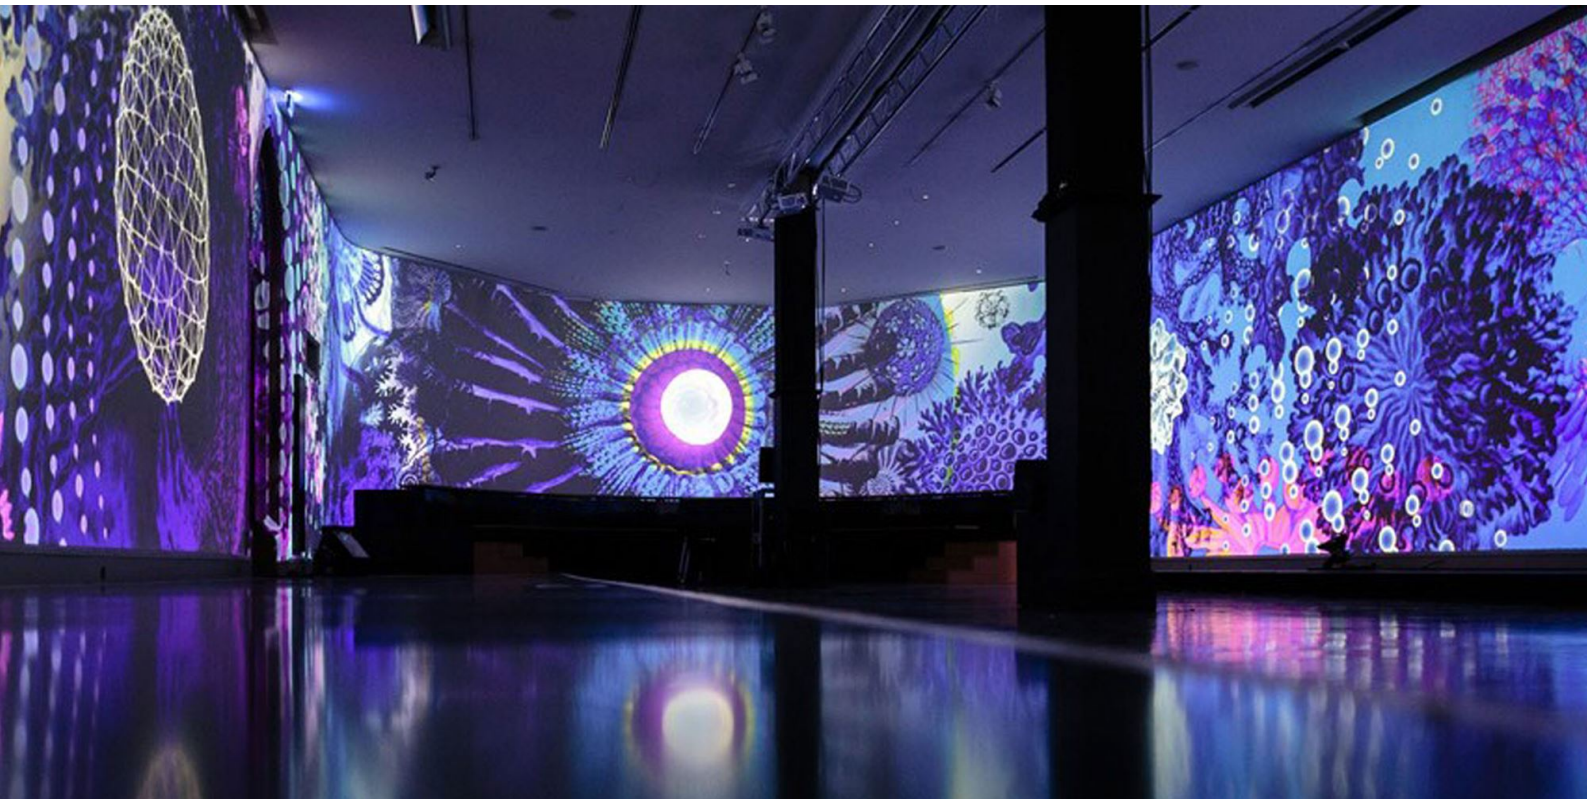

- **High brightness - 13,500 lumens 4K UHD+ WQUXGA laser projector**
- **DuraCore laser technology - Up to 30,000 hours laser light source**
- **10 lens options - 0.34:1 ~ 8.6:1 for flexible utilization of installation space (not all options immediately available)**
- **Venue versatility - Ideal for digital signage, rental & staging, corporate and immersive applications**

The ZK1320 4K UHD+ (3840 x 2400) interchangeable lens laser projector delivers stunning visuals with enhanced colors and lifelike contrast, and features such as built-in edge-blending and warping and 4K HDR compatibility.

Powered by a new generation of Texas Instruments (TI) HEP DMD chipsets brings stunning visuals with enhanced colours and lifelike contrast.

Designed for even the most complex professional installations, the ZK1320 offers ten interchangeable lens options including a new zero offset ultra short throw lens for unmatched application flexibility.

Part of the DuraCore laser lineup, it combines a longer-lifetime light source and an independent IP-rated dust certification for ultimate peace of mind. Delivering up to an astonishing 30,000 hours, this projector achieves superior color rendition producing visually striking lifelike images with exceptional detail.

With integrated Art-Net support, this enables seamless synchronization with stage lighting and visual effect for live events. .

Compatible with the cloud-based Optoma Management Suite (OMS), the ZK1320 can be monitored and diagnosed, and receive commands from a centralized remote location

Specifications

UPC: 796435 44 767 0, EAN: 5055387668836, Colour: Black

<b>Display/image</b>	
Display technology	DLP™
Resolution	4K UHD+ (3840x2400)
Brightness	13,500 lumens
ANSI brightness	11,500
Contrast ratio - dynamic	4,000,000:1
Native aspect ratio	16:10
Aspect ratio - compatible	4:3,16:9,16:10
Keystone correction - horizontal	+/- 20°
Keystone correction - vertical	+/- 20°
Displayable colours (millions)	1073.4
Horizontal scan rate	15 ~ 140Khz
Vertical scan rate	24 ~ 240Hz
Uniformity	95%
Screen size	Dependent on lens
<b>Lamp info</b>	
Light source type	DuraCore Laser
LASER life	30,000 hours
<b>Optical</b>	
Throw ratio	Dependent on lens
Projection distance (m)	Dependent on lens
Lens options	BX-CTA28 - 0.34:1 ~ 0.37:1 BX-CTA11 - 0.78:1 ~ 0.90:1 BX-CTA12 - 0.90:1 ~ 1.30:1 BX-CTA07 - 1.30:1 ~ 1.80:1 BX-CTA08 - 1.25:1 ~ 2.0:1 BX-CTA20 - 1.44:1 ~ 1.8:1 BX-CTA21 - 1.80:1 ~ 2.40:1 BX-CTA22 - 2.40:1 ~ 4.80:1 BX-CTA23 - 4.80:1 ~ 8.64:1
<b>Connectivity</b>	
Connections	<b>Inputs</b> 2 x HDMI 2.0, 1 x DisplayPort 4K, 1 x 3D sync, 1 x HDBaseT 4K <b>Outputs</b> 1 x 3D sync, 1 x HDMI 2.0, 1 x USB-A power 2A <b>Control</b> 1 x Wired remote, 1 x RJ45, 1 x RS232
LAN - wireless networking	No
<b>General</b>	
Noise level (min)	35dB
Noise level (max)	40dB
PC compatibility	WQUXGA   4K UHD   WUXGA   Full HD
2D compatibility	4K UHD (30/60Hz)   1080P (30/60Hz)  720P (30/60Hz)
3D compatibility	Frame Pack   Frame Sequential   Top-bottom   Side by side
3D	Full 3D
Security	Security bar, Kensington Lock, Password protected interface
IP rating	IP5X
OSD / display languages	19 languages: Arabic, Danish, Dutch, English, Farsi, French, German, Indonesian, Italian, Japanese, Norwegian, Polish, Portuguese, Russian, Spanish, Swedish, Chinese (traditional), Turkish, Vietnamese
24/7 operation	Yes
360° operation	Yes
Operating conditions	0 - 40C   41 - 104F   Max Altitude10,000 ft   Max Humidity 85%
Remote control	Wired backlit PRO AV remote
Heat dissipation	2,900BTU/hour
In the box	AC power cable 3M, Quick start guide, AAA battery (2pcs), Remote Control
Input lag	4.50ms
Optional wireless models	QuickCast Bundle, QuickCast starter kit
<b>Networking</b>	
LAN - control	Yes
LAN - wireless networking	No
LAN	Yes
<b>Power</b>	
Power supply	100 - 240V, 50 - 60Hz
Power consumption (standby)	0.5W
Power consumption (min)	420W
Power consumption (max)	850W
<b>Weight and dimensions</b>	
Dimensions (W x D x H) mm	535 x 396 x 189
Gross weight	24 kg
Net weight	16.8 kg

